



SANS PAR

CAPE TOWN

Tel: 021-5110283 - Email: info@sanspar.co.za

JOHANNESBURG

Tel: 011-3976889 - Email: jhb@sanspar.co.za


DURBAN

Tel: 031-7002485 - Email: kzn@sanspar.co.za

GQEERHA

Tel: 041-4512360 - Email: salespe@effast.co.za

UNI-FLO RESILIENT SEAL GATE VALVE PN16 SANS 664

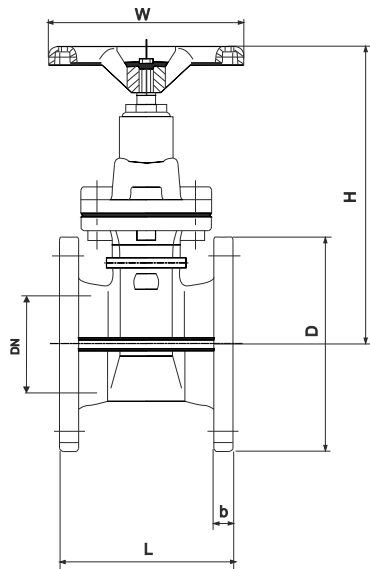

MATERIALS LIST

NO.	PART	MATERIAL
1	Body	S G Iron - BS 420/12
2	Gate	SG Iron - EPDM Encapsulated
3	Spindle	Stainless Steel 410
4	Spindle Nut	Brass
5	Gasket	EPDM
6	Cap Screws	High tensile steel
7	Gasket	Teflon
8	O-Rings	EPDM
9	O Rings	EPDM
10	Bonnet	SG Iron - BS 420/12
11	Gland	Brass
12	Washer	High tensile steel
13	Handwheel	SG Iron - BS 420/12
14	Bolt	High tensile steel
15	Weather Seal	NBR

UNI-FLO RSV VALVES

- 664 Non rising spindle
- Fusion bonded epoxy coated
- Pressure Rating: 16bar
- Fully encapsulated EPDM disc
- Handwheel, cap top or gearbox operated
- Available in flanged or socket end

DIMENSIONS

DN	L	D	b	H	W
50	216	165	19	270	180
65		185	19	283	180
80	229	200	19	311	220
100	254	220	19	352	250
125		250	19	435	280
150	280	285	19	485	320
200	317	340	20	520	350
250	356	405	22	632	400
300	380	460	25	745	400
350	470	520	27	835	500
400	470	580	28	853	600
450	485	640	30	1030	630
500	510	715	32	1100	630
600	600	840	36	1300	630

